


LT PR 3W/W

3W Pattern Projector, White

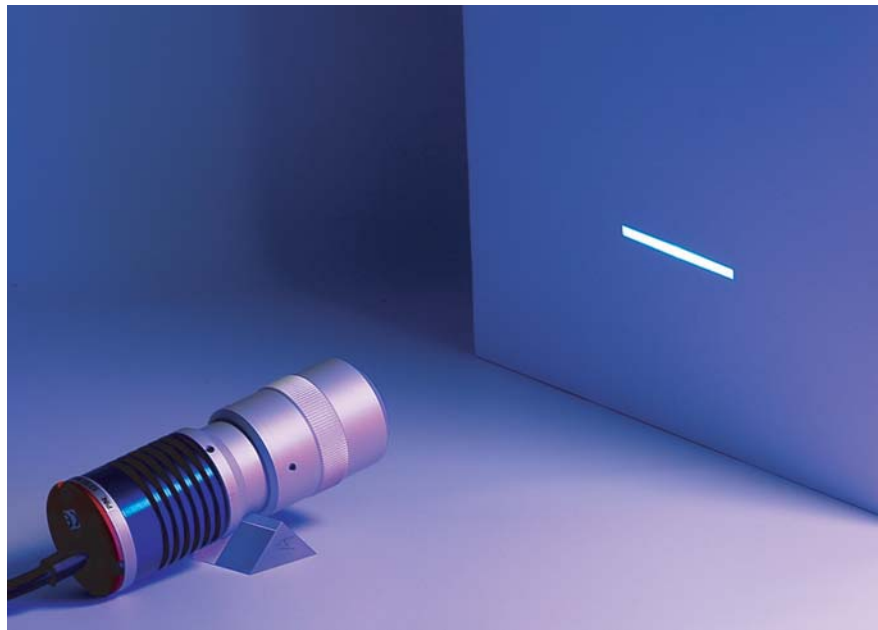

part number		LT PR 3W/W
Light Color, wavelength peak		white
DEVICE POWER RATINGS		
Minimum DC Voltage	(volt)	12
Maximum DC Voltage	(volt)	24
Power Consumption	(watt)	< 3
LED DIRECT DRIVE RATINGS		
Forward DC Voltage	(volt)	3,8
Forward Current	(mA)	700
Pulse Ratings @0,1 duty/1kHz	(mA)	< 1800

Rev No.	Description	Date	Name
A	Nuovo pezzo	05/12/07	A.Vismara



Scale 1 : 1

Material	N.A.			Mass	163.8 g	Scale	2:1
Surface treatment	N.A.			Project-Prod.Item/Instrument	LTSPPR		
Geometrical tolerance (ISO 2768-2)			Class	K	Undimensioned bevels	1x45°	Description LAYOUT WITH C-MOUNT
Linear tolerance (ISO 2768-2)			Class	m	Undimensioned radii	R 0.5	
0.5 +3	>3- 6	>6- 30	>30- 120	>120 +400	>400- 1000	>1000 +2000	>2000 +4000
±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2
www.opto-engineering.com			Date	Name		Drawing No.	Sheet
Designed			17/03/03	A.Vismara		03532-0-A	1/1
Draw			05/12/07	A.Vismara			
Checked			X	C. Sedazzari		Reproduction forbidden without specific authorization	